




Flexible Connectors Ton Containers or Cylinders

Flexible connectors provide an easy, stretchable and conformable path to attach one or more upright cylinders or ton containers to a pressure manifold or wall mounted vacuum regulator.

These flexible connectors are fabricated using 3/8" copper tubing which allows good flexibility without compromising wall thickness safety and are cadmium plated to resist corrosion in caustic environments.

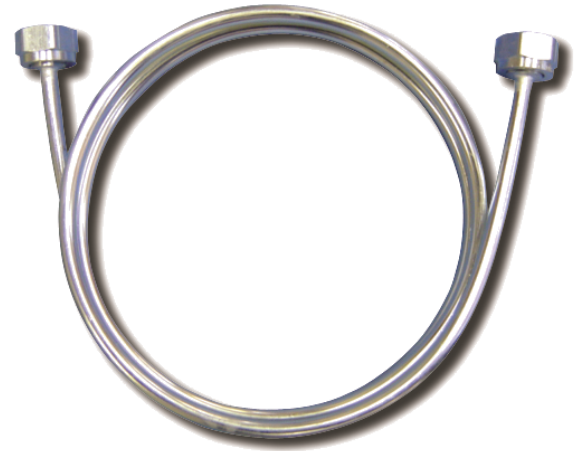

Features

- Extruded 3/8" OD copper tubing
- Silver soldered gasket connection
- CGA660 capture rings at both ends
- Corrosion resistant cadmium plating
- Various lengths available

Ordering Information

Part Number	Length (ft.)	Length (m)
FX-04	4 ft.	1.2 m
FX-06	6 ft.	1.8 m
FX-10	10 ft.	3.0 m
FX-16	16 ft.	4.8 m

